

# TAMINO h2-v2



# TAMINO h2-v2

The Tamino h2, v2 are Verity's solution for wall-mount and bookshelf loudspeaker requirements. They have been specifically designed for on-wall placement, primarily as a high-performance complement to flat panel video monitors, and are equally suited for front, center or surround channel applications. The h2, v2 may also be effectively employed in a traditional subwoofer-satellite system.

Very few compromises are made; from driver quality to enclosure design and finish, the Tamino h2, v2 inherit the quality and attention to detail that embodies our finest workmanship standards. They will ravish music lovers who look for limpid, detailed and precise sound while allowing a perfect integration in any room.

## Tamino v2 and h2

The Tamino h2, v2 incorporates a ¾" (19mm) diameter soft dome tweeter with a dual chamber motor and a 6-1/2" (65 mm) diameter woofer featuring TPX (Methylpentene Copolymer) cone material. The wall-fixture allows for a slight adjustment of the baffle downward slope that helps to position the speaker for proper directivity in relation to the listening position.


They are mounted via two identical and simple keyhole fixtures, one being integrated onto the rear panel of the loudspeaker and the other one being attached to the wall. The fixtures are designed to minimize the mounting space between the loudspeaker and wall. Should it be required to use an OmniMount™ compatible fixture, the h2, v2's mounting fixture provides the required provision for attachment.



The wall-mount Tamino h2, v2 loudspeakers use the same high-quality woofer and tweeter found in our excellent Tamino x2. Their sealed enclosure configuration gives freedom in a number of configurations and allows them to work in virtually any environment. They exhibit a well-controlled and full-bodied bass performance while having smooth, articulate and coherent mid-highs. It all allows them to image superbly well. The horizontal design of the Tamino h2 makes it ideal for center channel applications while the vertical design of the Tamino v2 makes it ideal for satellite utilization.

All Verity designs are crafted with a balance of science and art. It is only through this tradition that the spirit of knowledge and craftsmanship come alive.

Please contact your nearest Verity dealer and experience the Tamino h2, v2 today.

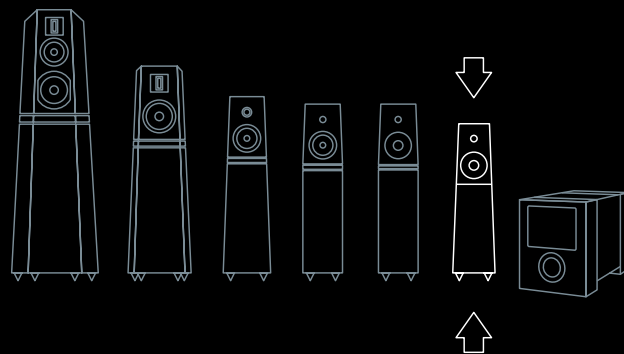

## TAMINO h2-v2

### SPECIFICATIONS

Bandwidth:	60 to 22,000 Hz $\pm$ 3dB
Woofer:	6.5" (65 mm) TPX Dynamic damping motor
Tweeter:	3/4" (19 mm) soft dome, dual chamber SD-2 motor
Input Power:	18 watts ( 8 $\Omega$ ) minimum recommended
Sensitivity:	89 dB @ 2.83 Vrms & 1 meter on axis
Impedance:	8 $\Omega$ nominal, 6.8 $\Omega$ minimal

### DIMENSIONS & WEIGHTS

W x D x H:	
• h2	24.0 x 4.5 x 11.0" (615 x 117 x 279 mm)
• v2	11.0 x 4.5 x 24.0" (279 x 279 x 615 mm)
Weight:	24 lbs (10.9 kg) 30 lbs (13.6 kg) packed / unit

### CABINET FINISH

Standard:	Natural Sycamore & Sapele
Special Order:	High-Gloss Piano Black, Silver, Makore & Quilted Big Leaf Maple

### FEATURES & ACCESSORIES

Connectors:	Gold-plated • removable posts
Wall mounting plate:	Aluminum plate for flush mounting

verity

[www.verityaudio.com](http://www.verityaudio.com)

Driven by a passion for excellence and focused on painstaking attention to detail, we are wholeheartedly committed to crafting sound systems capable of unveiling the timeless beauty of a true musical experience.

All Verity loudspeakers share a common trait, which is exceptional "Synergy". Our secret resides in the way we thoroughly integrate all ingredients to form a perfect balance.



You can contact Verity Monday through Friday from 9:00 A.M. to 5:00 P.M. Eastern Standard Time (EST), except on holidays.

**Sales & General Information:** [info@verityaudio.com](mailto:info@verityaudio.com) **Servicing:** [support@verityaudio.com](mailto:support@verityaudio.com)

Phone: 418-682-9940 Fax: 418-682-8644